

Eagle 42-40

Deep Cooled Vacuum CCD • High Resolution Scientific Imaging •
2048 x 2048 • 75kHz and 2MHz Readout Speeds •



Key Features and Benefits

The BEST CCD on the market today!

- **7 year vacuum guarantee**
Protection and integrity of the sensor
- **Extremely low dark current**
Deep cooled -90°C with 20°C liquid coolant which enables long exposure times
- **Back illuminated 4MP sensor from e2v**
Enables large field of view imaging. UV option available
- **F-Mount Integrated shutter**
Closed during readout to avoid vertical smear
- **High QE: >90% @ 525nm and 50% @ 380nm & 720nm**
Optimum photon collection

Resolution	2048 x 2048
Dark Current	0.0001 e/p/s
Full Well Capacity	100ke-
Readout Noise	2.3e-rms
Camera Link	16 bit

Specification for Eagle 42-40

Sensor	E2V CCD42-40 Front and Back Illuminated
Active Pixel	2048 × 2048
Pixel Size	13.5µm × 13.5µm
Active Area	27.65mm × 27.65mm (39.10mm diagonal)
Binning	Programmable, up to 64×64 pixels
Full Well Capacity	Minimum: 80ke- Typical: 100ke-
Shift Register Well Depth	150ke-
Non-Linearity	< 1%
Readout Noise (RMS)	<3.5e- @ 75kHz (2.3e-typical) <12e- @ 2MHz (9.0e-typical)
Binned Readout Noise	@75kHz pixel readout rate, 16×16 binning < 5.0 e- rms
Peak Quantum Efficiency (QE)	> 90% @ 550nm
Spectral Response ¹	300 - 1100nm
Shutter	Mechanical, aperture φ = 45mm
Cooling	Active, ΔT > -90°C with 20°C coolant
Cooling Method	TEC with liquid (utilizing PentaVac™ Technology)
Lens Mount	Nikon F mount (others on request)
Synchronization	Trigger IN and OUT – TTL compatible
Digital Output Format	16-bit Camera Link (base)
Power Supply	12V DC ±10%
Total Power Consumption ³	<100W (TEC ON, Steady State)
Operating Temperature Range	0°C to +55°C
Storage Temperature Range	-30°C to +60°C
Dimensions (L*W*H) ⁴	155.08mm x 140.89mm x 110.00mm
Weight (excluding lens)	3.0kg [6.6lb]

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Demo is available on request.
Pricing AOR subject to volumes.

Ordering Information

Camera

Eagle CCD 4MP Deep cooled digital camera Back thinned visible	EA4240V-BV-CL
Eagle CCD 4MP Deep cooled digital camera Enhanced UV	EA4240V-UV-CL
Eagle PSU	EA4240V-PSU
Eagle Power Brick	EA-BRK-150W


Optional Accessories

Mini PC with XCAP Std and frame grabber	RPL-PC-mf2280
Thunderbolt frame grabber	RPL-mf2280
EPIX® EB1 frame grabber	RPL-EPIX-EB1
EPIX® XCAP Std software	RPL-XCAP-STD
Camera Link Cable (2m) ⁵	RPL-CL-CBL-2M
Thermoelectric Water Chiller Unit ⁶	RPL-CHILLER
Water tubing (3m) ⁷	RPL-WTUBE-EAGLE
Optical lenses ⁸	RPL-xx-xxxx

- Note 1: UV window available on request.
- Note 2: Values not valid for EA4240V-UV-CL model.
- Note 3: For more detailed power consumption values, please refer to the user manual.
- Note 4: Dimensions include all connector parts on the camera interface.
- Note 5: Longer Camera Link cable available.
- Note 6: Recommended coolant flow rate >0.5l/min & cooling capacity >100W @ 20°C.
- Note 7: Includes tubing and connectors.
- Note 8: Please consult us to check our range of lenses.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

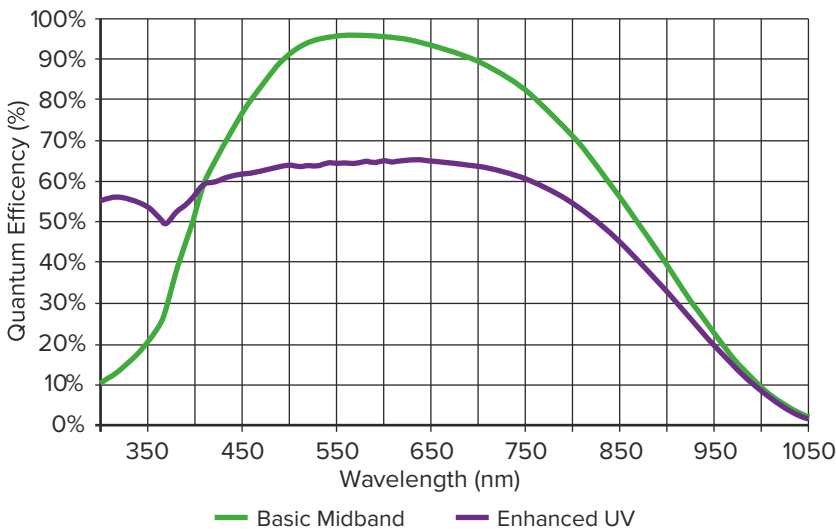

*Data supplied by sensor manufacturer

Applications

Scientific

- Astronomy
- BioChip reading
- Bio / Chemi luminescence
- Bose Einstein condensate (BEC)
- Calcium signaling
- Fluorescence imaging / Spectroscopy
- Luminescence
- Photovoltaic
- Semiconductor analysis
- X-ray



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

Document #: USEA4240-CL 0322

